

TECHNOLOGY TO THE POINT



NINGBO ZHAFIR PLASTICS MACHINERY MANUFACTURING CO., LTD.
No. 98 Guanhai Road, Chunxiao, Beilun, Ningbo, China 315800


Tel. +86-574-86182986
Fax. +86-574-86182977
E-Mail: contact@mail.zhafir.cn
www.zhafir.cn



VENUS SERIES

TECHNICAL SPECIFICATION

5,500 – 13,800 kN

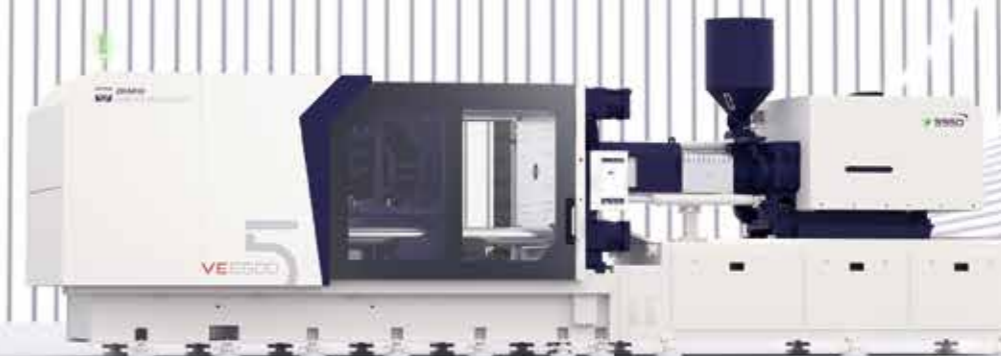


TECHNICAL DATA VE5500 V

		CLAMPING UNIT											
Clamping force	kN	5500											
Mold opening stroke	mm	900											
Mold height min.	mm	400											
Mold height max.	mm	880											
Total daylight max.	mm	1780											
Dist. Between tie-bars (H×V)	mm	970×970											
Size of mold platen (H×V)	mm	1320×1320											
Mold dimension min.	mm	630×630											
Ejector stroke	mm	180											
Ejector force	kN	137.2											
		A	B	C	A	B	C	A	B	C	A	B	C
Screw diameter	mm	55	60	65	60	65	70	65	70	80	75	80	90
Screw L/D ratio	L/D	21.8	20	18.5	21.6	20	18.6	21.5	20	17.5	21.3	20	17.8
Injection volume (theoretical) ¹	cm ³	617	735	862	791	929	1077	1068	1239	1618	1634	1859	2353
Injection weight (PS) ²	g	562	668	785	720	845	980	972	1127	1472	1487	1692	2141
Injection pressure ³	MPa	214	180	153	210	180	155	210	180	138	205	180	142
	bar	2140	1800	1530	2100	1800	1550	2100	1800	1380	2050	1800	1420
Holding pressure ³	MPa	190	160	136	187	160	138	190	162	124	185	162	128
	bar	1900	1600	1360	1870	1600	1380	1900	1620	1240	1850	1620	1280
Screw speed	rpm	300			260			240			220		
Plasticizing rate (GPPS) ⁴	g/s	54	64	71	57	68	72	62	71	88	70	92	105
Plasticizing rate (HDPE) ⁵	g/s	-	-	-	-	-	-	93	111	132	105	141	165
Nozzle contact force	kN	54			54			85			85		
INJECTION UNIT		1400			1700			2250			3350		
Injection speed	mm/s	160			160			160			160		
Injection rate (PS)	g/s	332	395	463	395	463	537	463	537	702	617	702	889
INJECTION UNIT		1400h			1700h			2250h			-		
Injection speed	mm/s	250			250			250			-		
Injection rate (PS)	g/s	518	617	724	617	724	840	723	839	1097	-	-	-
INJECTION UNIT		1400hs			1700hs			-			-		
Injection speed	mm/s	350			350			-			-		
Injection rate (PS)	g/s	726	864	1014	864	1014	1176	-	-	-	-	-	-
Connection power	kW/A	1400:52/87 1400h:65/109 1400hs:69/115			1700:58/98 1700h:74/125 1700hs:83/139			2250:65/109 2250h:89/150			83/138		
Heating power	kW	29.3			33.1			36.1			42.6		
Machine dimension	m	8.48×2.29×2.50			8.62×2.29×2.50			8.48×2.29×2.50			8.74×2.29×2.50		
Machine weight	t	25.74			26.44			28.00			28.11		
Hopper capacity	l	50			50			50			100		


NOTE: ¹ Shot volume is the theoretical value which equals to cross section area of screw cylinder or barrel plunger × screw stroke.
² Shot weight (PS) is the theoretical value of shot volume melt density of PS. It is not a measured value.
³ Injection & holding pressure are theoretical values of machine output, not the actual resin pressure.
⁴ Plasticizing capacity(GPPS):GB standard, with application of GPPS plasticizing capacity of 3-zone screws.
⁵ Plasticizing capacity(HDPE):Euromap 19, with application of HDPE plasticizing capacity of barrier screws.

MACHINE DIMENSIONS

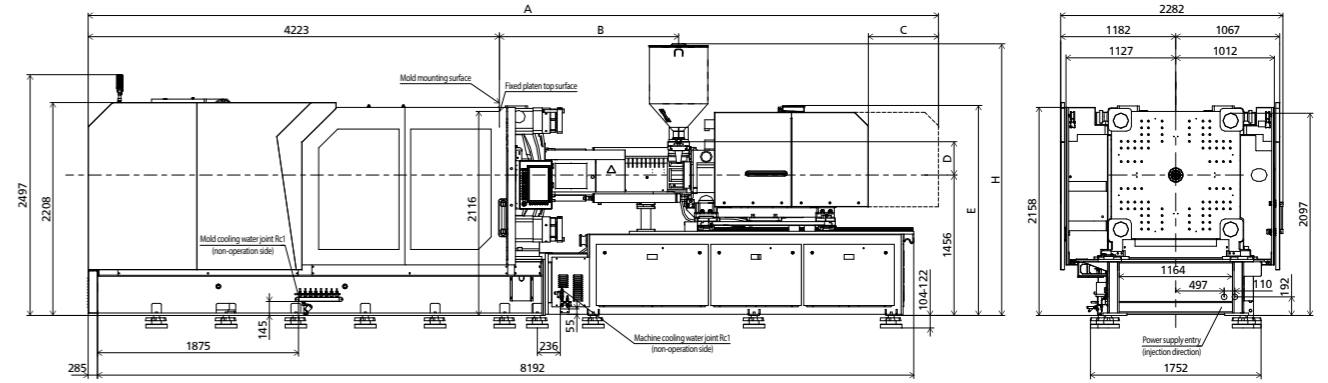


	A	B	C	D	E	F	G	H	I	J	K	L	M	N
1400,1400h,1400hs	8176	1383	560	245	2167	4XM10 L20	115	2304	143	82	115	204	Ø3	SR10
1700,1700h,1700hs	8619	1543	560	250	2259	4XM10 L20	115	2309	148	95	115	222.5	Ø3	SR10
2250,2250h	8353	1630	610	327	2107	4XM10 L20	115	2470	225	95	115	67	Ø4	SR15
3350	8732	1841	720	346	2107	4XM12 L25	170	2796	225	100	170	128	Ø4	SR15

PLATEN DIMENSIONS

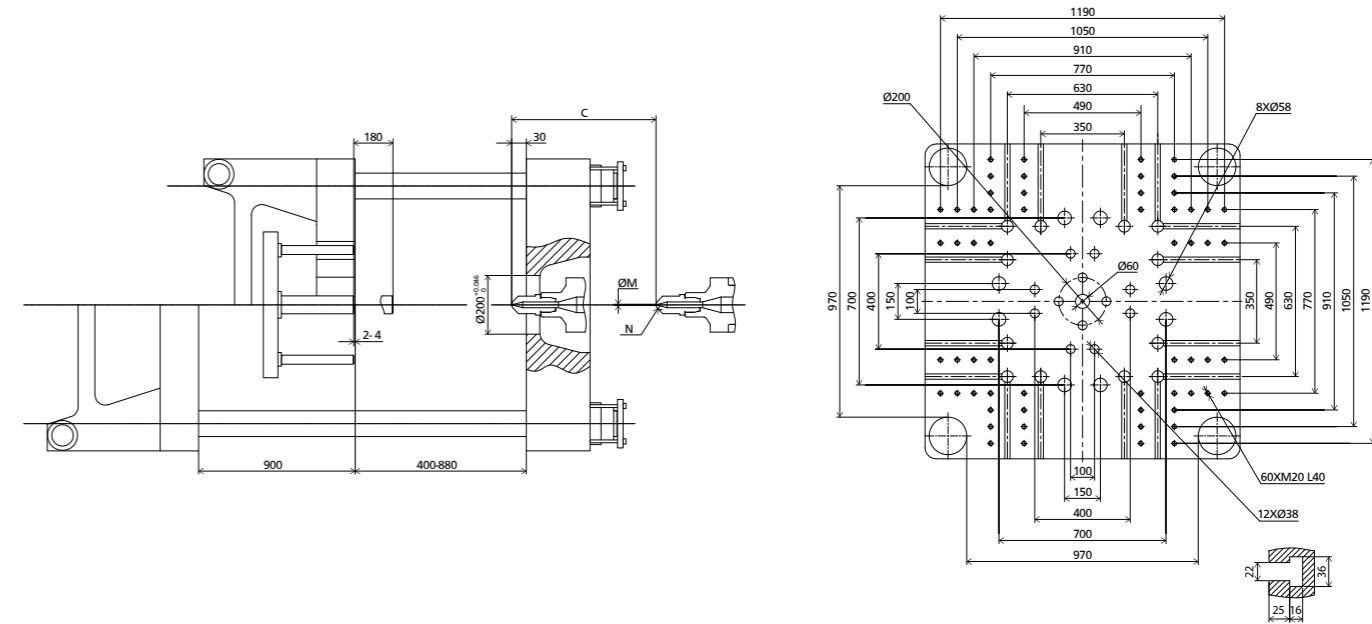

OTHERS DIMENSIONS

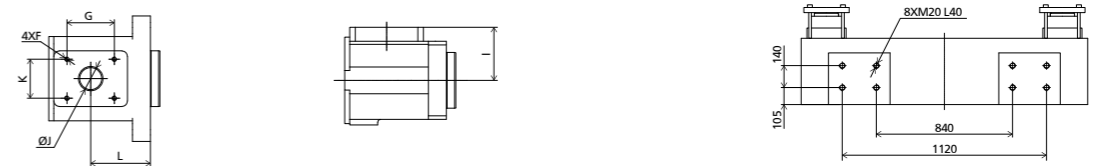

HOPPER MOUNTING DIMENSION

ROBOT TOP VIEW FIXED PLATEN

This parameter table is based on machine standard configuration;
 We reserve the right to make changes as a result of further technical advances.



TECHNICAL DATA VE6500 V

		CLAMPING UNIT																	
		A			B			C			A			B			C		
Clamping force	kN	6500																	
Mold opening stroke	mm	1000																	
Mold height min.	mm	420																	
Mold height max.	mm	1000																	
Total daylight max.	mm	2000																	
Dist. Between tie-bars (H×V)	mm	1080×1080																	
Size of mold platen (H×V)	mm	1460×1460																	
Mold dimension min.	mm	700×700																	
Ejector stroke	mm	200																	
Ejector force	kN	196																	
		A			B			C			A			B			C		
Screw diameter	mm	60	65	70	65	70	80	75	80	90	80	90	100						
Screw L/D ratio	L/D	21.6	20	18.6	21.5	20	17.5	21.3	20	17.8	24.8	22	19.8						
Injection volume (theoretical) ¹	cm ³	791	929	1077	1068	1239	1618	1634	1859	2353	2261	2862	3534						
Injection weight (PS) ²	g	720	845	980	972	1127	1472	1487	1692	2141	2058	2605	3216						
Injection pressure ³	MPa	210	180	155	210	180	138	205	180	142	227	180	145						
	bar	2100	1800	1550	2100	1800	1380	2050	1800	1420	2270	1800	1450						
Holding pressure ³	MPa	187	160	138	190	162	124	185	162	128	204	162	131						
	bar	1870	1600	1380	1900	1620	1240	1850	1620	1280	2040	1620	1310						
Screw speed	rpm	260			240			220			190								
Plasticizing rate (GPPS) ⁴	g/s	57	68	72	62	71	88	70	92	105	85	107	131						
Plasticizing rate (HDPE) ⁵	g/s	-	-	-	93	111	132	105	141	165	128	162	200						
Nozzle contact force	kN	54			85			85			85								
INJECTION UNIT		1700			2250			3350			5200								
Injection speed	mm/s	160			160			160			160								
Injection rate (PS)	g/s	395	463	537	463	537	702	617	702	889	702	889	1097						
INJECTION UNIT		1700h			2250h			-			-								
Injection speed	mm/s	250			250			-			-								
Injection rate (PS)	g/s	617	724	840	723	839	1097	-	-	-	-	-	-						
INJECTION UNIT		1700hs			-			-			-								
Injection speed	mm/s	350			-			-			-								
Injection rate (PS)	g/s	864	1014	1176	-	-	-	-	-	-	-	-	-						
Connection power	kW/A	1700:58/98			2250:65/109			83/138			98/164								
		1700h:74/125			2250h:89/150														
		1700hs:83/139																	
Heating power	kW	33.1			36.1			42.6			54.3								
Machine dimension	m	9.70×2.44×2.70			9.70×2.44×2.70			9.70×2.44×2.70			9.81×2.44×2.70								
Machine weight	t	32.14			33.70			33.80			34.73								
Hopper capacity	l	50			50			100			100								

NOTE: ¹ Shot volume is the theoretical value which equals to cross section area of screw cylinder or barrel plunger × screw stroke.

² Shot weight (PS) is the theoretical value of shot volume melt density of PS. It is not a measured value.


³ Injection & holding pressure are theoretical values of machine output, not the actual resin pressure.

⁴ Plasticizing capacity(GPPS):GB standard, with application of GPPS plasticizing capacity of 3-zone screws.

⁵ Plasticizing capacity(HDPE):Euromap 19, with application of HDPE plasticizing capacity of barrier screws.


This parameter table is based on machine standard configuration;
We reserve the right to make changes as a result of further technical advances.

MACHINE DIMENSIONS



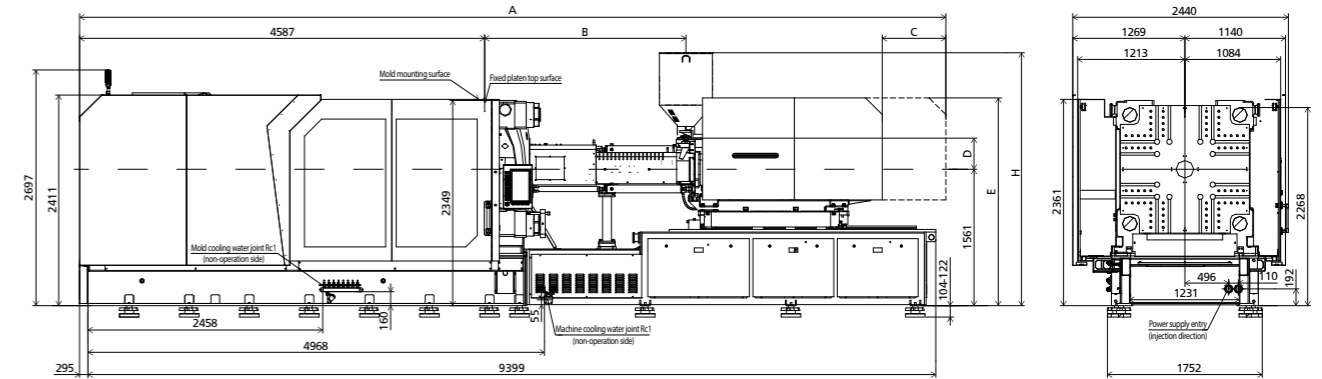


	A	B	C	D	E	F	G	H	I	J	K	L	M	N
1700h,1700h,1700hs	8983	1543	560	250	2364	4XM10 L20	115	2414	148	95	115	222.5	Ø3	SR10
2250h,2250h	8717	1630	610	327	2212	4XM10 L20	115	2575	225	95	115	67	Ø4	SR15
3350	9096	1841	720	346	2212	4XM12 L25	170	2901	225	100	170	128	Ø4	SR15
5200	9808	2278	720	356	2378	4XM12 L20	170	2895	220	100	170	105	Ø4	SR15

PLATEN DIMENSIONS

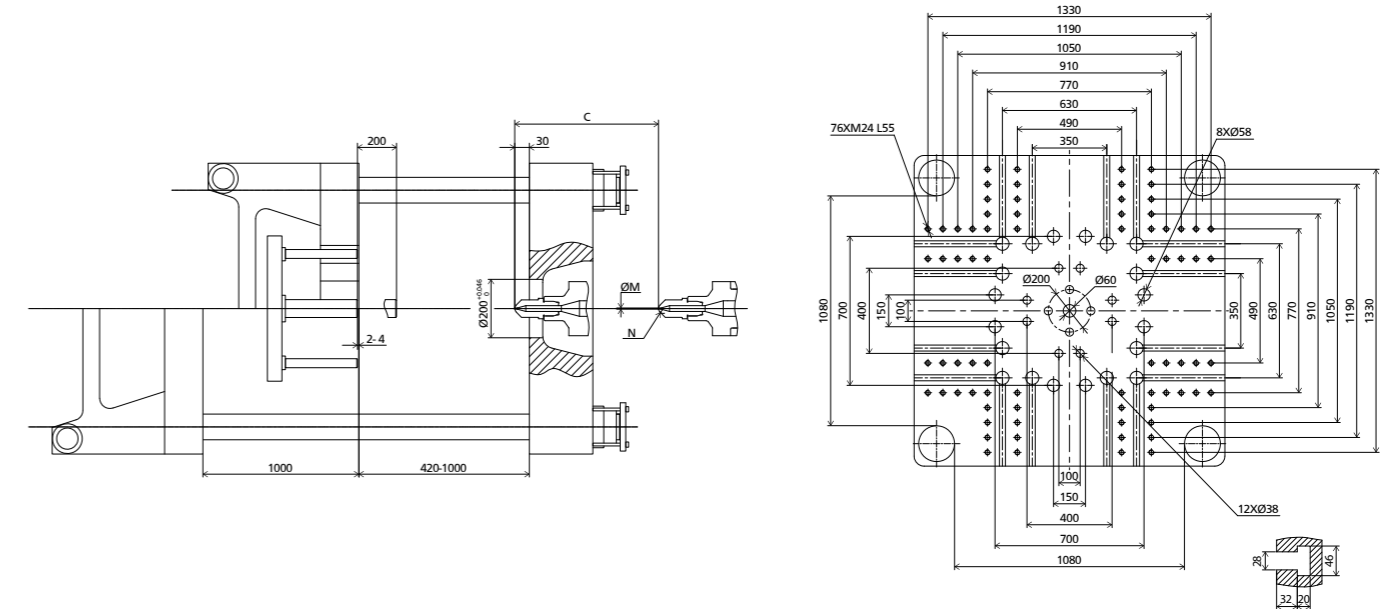

OTHERS DIMENSIONS



HOPPER MOUNTING DIMENSION

ROBOT TOP VIEW FIXED PLATEN

TECHNICAL DATA VE8000 V

		CLAMPING UNIT											
		A			B			C			D		
Clamping force	kN	8000											
Mold opening stroke	mm	1000											
Mold height min.	mm	420											
Mold height max.	mm	1000											
Total daylight max.	mm	2000											
Dist. Between tie-bars (H×V)	mm	1080×1080											
Size of mold platen (H×V)	mm	1480×1480											
Mold dimension min.	mm	700×700											
Ejector stroke	mm	200											
Ejector force	kN	196											
		A			B			C			D		
Screw diameter	mm	60	65	70	65	70	80	75	80	90	80	90	100
Screw L/D ratio	L/D	21.6	20	18.6	21.5	20	17.5	21.3	20	17.8	24.8	22	19.8
Injection volume (theoretical) ¹	cm ³	791	929	1077	1068	1239	1618	1634	1859	2353	2261	2862	3534
Injection weight (PS) ²	g	720	845	980	972	1127	1472	1487	1692	2141	2058	2605	3216
Injection pressure ³	MPa	210	180	155	210	180	138	205	180	142	227	180	145
	bar	2100	1800	1550	2100	1800	1380	2050	1800	1420	2270	1800	1450
Holding pressure ³	MPa	187	160	138	190	162	124	185	162	128	204	162	131
	bar	1870	1600	1380	1900	1620	1240	1850	1620	1280	2040	1620	1310
Screw speed	rpm	260			240			220			190		
Plasticizing rate (GPPS) ⁴	g/s	57	68	72	62	71	88	70	92	105	85	107	131
Plasticizing rate (HDPE) ⁵	g/s	-	-	-	93	111	132	105	141	165	128	162	200
Nozzle contact force	kN	54			85			85			85		
INJECTION UNIT		1700			2250			3350			5200		
Injection speed	mm/s	160			160			160			160		
Injection rate (PS)	g/s	395	463	537	463	537	702	617	702	889	702	889	1097
INJECTION UNIT		1700h			2250h			-			-		
Injection speed	mm/s	250			250			-			-		
Injection rate (PS)	g/s	617	724	840	723	839	1097	-	-	-	-	-	-
INJECTION UNIT		1700hs			-			-			-		
Injection speed	mm/s	350			-			-			-		
Injection rate (PS)	g/s	864	1014	1176	-	-	-	-	-	-	-	-	-
Connection power	kW/A	1700:58/98			2250:65/109			83/138			98/164		
		1700h:74/125			2250h:89/150								
Heating power	kW	33.1			36.1			42.6			54.3		
Machine dimension	m	9.70×2.44×2.70			9.70×2.44×2.70			9.70×2.44×2.70			9.81×2.44×2.70		
Machine weight	t	35.73			37.28			37.38			38.38		
Hopper capacity	l	50			50			100			100		

NOTE: ¹ Shot volume is the theoretical value which equals to cross section area of screw cylinder or barrel plunger × screw stroke.

² Shot weight (PS) is the theoretical value of shot volume melt density of PS. It is not a measured value.


³ Injection & holding pressure are theoretical values of machine output, not the actual resin pressure.

⁴ Plasticizing capacity(GPPS):GB standard, with application of GPPS plasticizing capacity of 3-zone screws.

⁵ Plasticizing capacity(HDPE):Euromap 19, with application of HDPE plasticizing capacity of barrier screws.


This parameter table is based on machine standard configuration;
We reserve the right to make changes as a result of further technical advances.

MACHINE DIMENSIONS

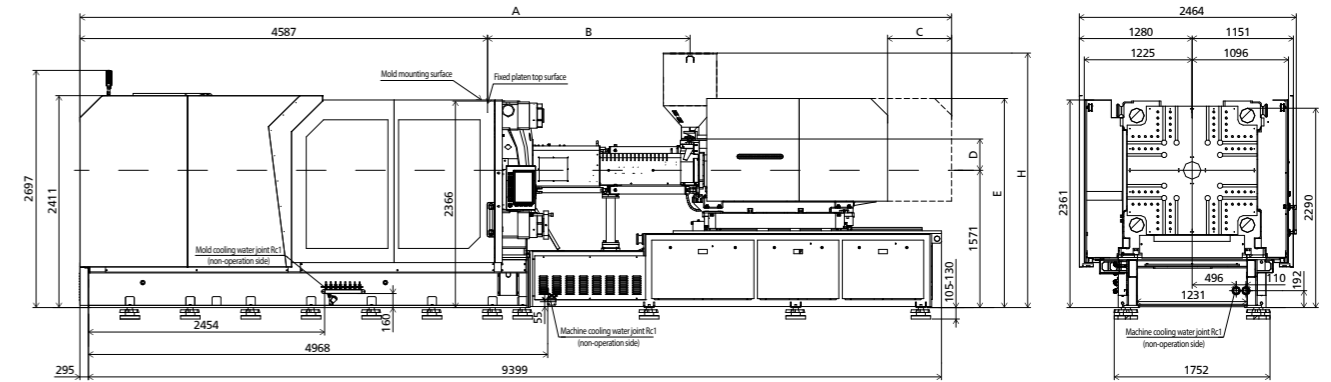


	A	B	C	D	E	F	G	H	I	J	K	L	M	N
1700h,1700h,1700hs	8983	1543	560	250	2374	4XM10 L20	115	2424	148	95	115	222.5	Ø3	SR10
2250h,2250h	8717	1630	610	327	2222	4XM10 L20	115	2585	225	95	115	67	Ø4	SR15
3350	9096	1841	720	346	2222	4XM12 L25	170	2911	225	100	170	128	Ø4	SR15
5200	9808	2278	720	356	2388	4XM12 L20	170	2905	220	100	170	105	Ø4	SR15

PLATEN DIMENSIONS

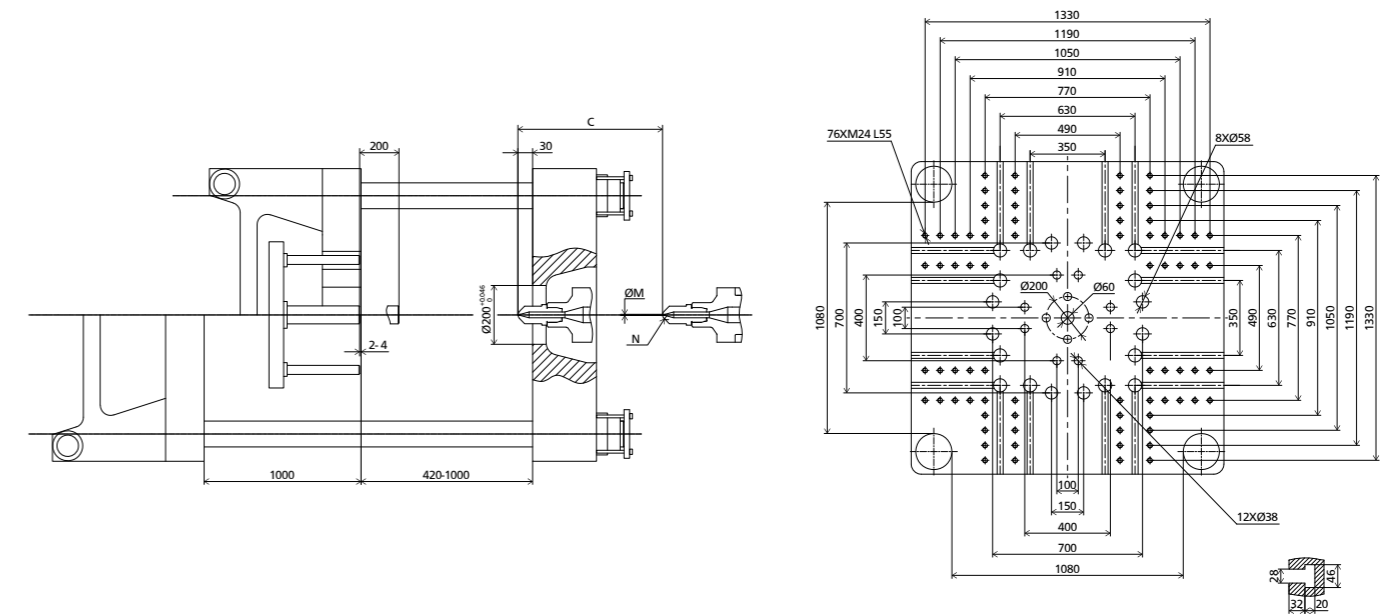

OTHERS DIMENSIONS

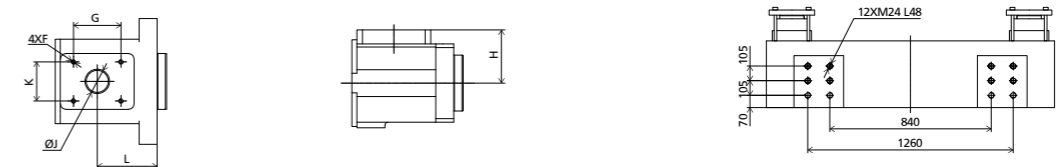

HOPPER MOUNTING DIMENSION

ROBOT TOP VIEW FIXED PLATEN

TECHNICAL DATA VE8500 V

		CLAMPING UNIT															
		A			B			C			A			B			C
Clamping force	kN	8500															
Mold opening stroke	mm	1200															
Mold height min.	mm	450															
Mold height max.	mm	1100															
Total daylight max.	mm	2300															
Dist. Between tie-bars (H×V)	mm	1160×1160															
Size of mold platen (H×V)	mm	1550×1550															
Mold dimension min.	mm	770×770															
Ejector stroke	mm	200															
Ejector force	kN	230															
		INJECTION UNIT															
Screw diameter	mm	65	70	80	75	80	90	80	90	100	90	100	110				
Screw L/D ratio	L/D	21.5	20	17.5	21.3	20	17.8	24.8	22	19.8	24.4	22	20				
Injection volume (theoretical) ¹	cm ³	1068	1239	1618	1634	1859	2353	2261	2862	3534	2989	3691	4466				
Injection weight (PS) ²	g	972	1127	1472	1487	1692	2141	2058	2605	3216	2720	3359	4064				
Injection pressure ³	MPa	210	180	138	205	180	142	227	180	145	222	180	149				
	bar	2100	1800	1380	2050	1800	1420	2270	1800	1450	2220	1800	1490				
Holding pressure ³	MPa	190	162	124	185	162	128	204	162	131	200	162	133				
	bar	1900	1620	1240	1850	1620	1280	2040	1620	1310	2000	1620	1330				
Screw speed	rpm	240			220			190			170						
Plasticizing rate (GPPS) ⁴	g/s	62	71	88	70	92	105	85	107	131	103	127	150				
Plasticizing rate (HDPE) ⁵	g/s	93	111	132	105	141	165	128	162	200	156	191	228				
Nozzle contact force	kN	85			85			85			85						
INJECTION UNIT		2250			3350			5200			6700						
Injection speed	mm/s	160			160			160			150						
Injection rate (PS)	g/s	463	537	702	617	702	889	702	889	1097	833	1029	1245				
INJECTION UNIT		2250h			-			-			-						
Injection speed	mm/s	250			-			-			-						
Injection rate (PS)	g/s	723	839	1097	-	-	-	-	-	-	-	-	-				
OTHERS		2250:65/109			83/138			98/164			126/211						
Connection power	kW/A	2250h:89/150															
Heating power	kW	36.1			42.6			54.3			75.6						
Machine dimension	m	11.17×2.49×2.67			11.17×2.49×2.67			11.17×2.49×2.67			11.17×2.49×2.67						
Machine weight	t	48.70			48.80			49.70			49.80						
Hopper capacity	l	50			100			100			100						

NOTE: ¹ Shot volume is the theoretical value which equals to cross section area of screw cylinder or barrel plunger × screw stroke.

² Shot weight (PS) is the theoretical value of shot volume melt density of PS. It is not a measured value.


³ Injection & holding pressure are theoretical values of machine output, not the actual resin pressure.

⁴ Plasticizing capacity(GPPS):GB standard, with application of GPPS plasticizing capacity of 3-zone screws.

⁵ Plasticizing capacity(HDPE):Euromap 19, with application of HDPE plasticizing capacity of barrier screws.


This parameter table is based on machine standard configuration;
We reserve the right to make changes as a result of further technical advances.

MACHINE DIMENSIONS

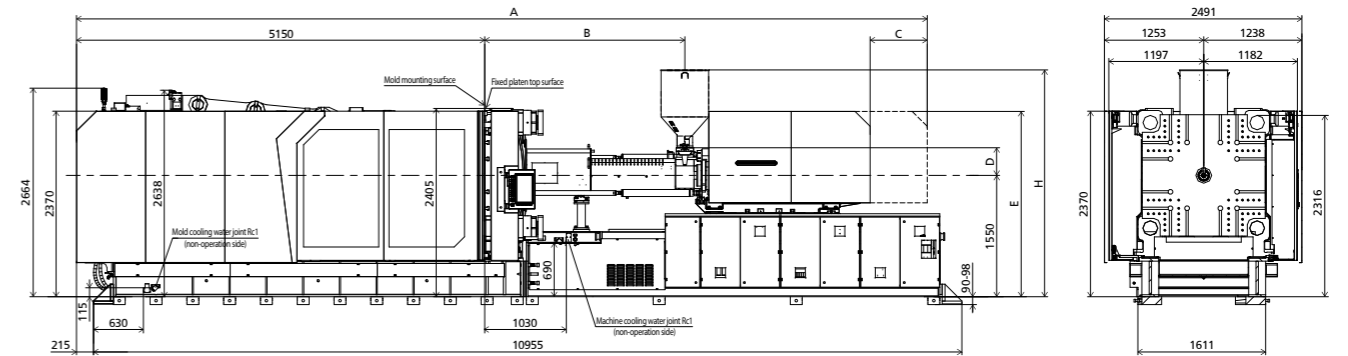


	A	B	C	D	E	F	G	H	I	J	K	L	M	N
2250,2250h	9280	1630	610	327	2201	4XM10 L20	115	2564	225	95	115	67	Ø4	SR15
3350	9549	1841	610	346	2201	4XM12 L25	170	2890	225	100	170	128	Ø4	SR15
5200	10371	2278	720	356	2367	4XM12 L20	170	2884	220	100	170	105	Ø4	SR15
6700	10732	2525	720	354	2367	4XM12 L20	170	2897	232	100	170	115	Ø6	SR20

PLATEN DIMENSIONS

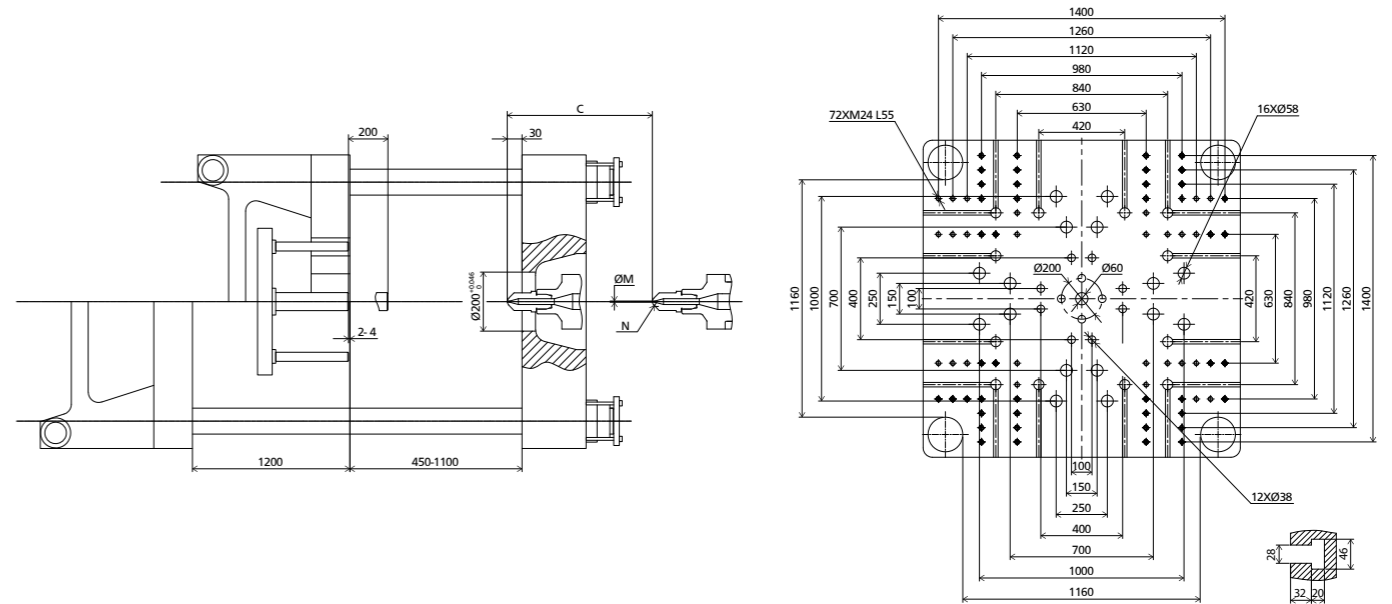

OTHERS DIMENSIONS

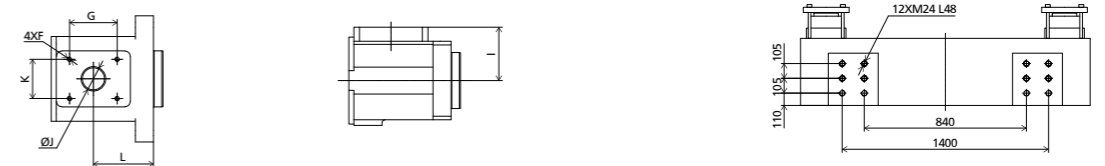

HOPPER MOUNTING DIMENSION

ROBOT TOP VIEW FIXED PLATEN

TECHNICAL DATA VE10000 V

CLAMPING UNIT	Clamping force	kN	10000											
	Mold opening stroke	mm	1200											
	Mold height min.	mm	450											
	Mold height max.	mm	1100											
	Total daylight max.	mm	2300											
	Dist. Between tie-bars (H×V)	mm	1160×1160											
	Size of mold platen (H×V)	mm	1590×1590											
Mold dimension min.	mm	770×770												
Ejector stroke	mm	200												
Ejector force	kN	230												
INJECTION UNIT			A	B	C	A	B	C	A	B	C	A	B	C
	Screw diameter	mm	65	70	80	75	80	90	80	90	100	90	100	110
	Screw L/D ratio	L/D	21.5	20	17.5	21.3	20	17.8	24.8	22	19.8	24.4	22	20
	Injection volume (theoretical) ¹	cm ³	1068	1239	1618	1634	1859	2353	2261	2862	3534	2989	3691	4466
	Injection weight (PS) ²	g	972	1127	1472	1487	1692	2141	2058	2605	3216	2720	3359	4064
	Injection pressure ³	MPa	210	180	138	205	180	142	227	180	145	222	180	149
		bar	2100	1800	1380	2050	1800	1420	2270	1800	1450	2220	1800	1490
	Holding pressure ³	MPa	190	162	124	185	162	128	204	162	131	200	162	133
		bar	1900	1620	1240	1850	1620	1280	2040	1620	1310	2000	1620	1330
	Screw speed	rpm	240			220			190			170		
	Plasticizing rate (GPPS) ⁴	g/s	62	71	88	70	92	105	85	107	131	103	127	150
	Plasticizing rate (HDPE) ⁵	g/s	93	111	132	105	141	165	128	162	200	156	191	228
	Nozzle contact force	kN	85			85			85			85		
INJECTION UNIT		2250			3350			5200			6700			
Injection speed	mm/s	160			160			160			150			
Injection rate (PS)	g/s	463	537	702	617	702	889	702	889	1097	833	1029	1245	
INJECTION UNIT		2250h			-			-			-			
Injection speed	mm/s	250			-			-			-			
Injection rate (PS)	g/s	723	839	1097	-	-	-	-	-	-	-	-	-	
OTHERS	Connection power	kW/A	2250:65/109 2250h:89/150			83/138			98/164			126/211		
	Heating power	kW	36.1			42.6			54.3			75.6		
	Machine dimension	m	11.20×2.49×2.67			11.20×2.49×2.67			11.20×2.49×2.67			11.20×2.49×2.67		
	Machine weight	t	54.60			54.67			55.60			55.73		
	Hopper capacity	l	50			100			100			100		

NOTE: ¹ Shot volume is the theoretical value which equals to cross section area of screw cylinder or barrel plunger × screw stroke.

² Shot weight (PS) is the theoretical value of shot volume melt density of PS. It is not a measured value.


³ Injection & holding pressure are theoretical values of machine output, not the actual resin pressure.

⁴ Plasticizing capacity(GPPS):GB standard, with application of GPPS plasticizing capacity of 3-zone screws.

⁵ Plasticizing capacity(HDPE):Euromap 19, with application of HDPE plasticizing capacity of barrier screws.


This parameter table is based on machine standard configuration;
We reserve the right to make changes as a result of further technical advances.

MACHINE DIMENSIONS

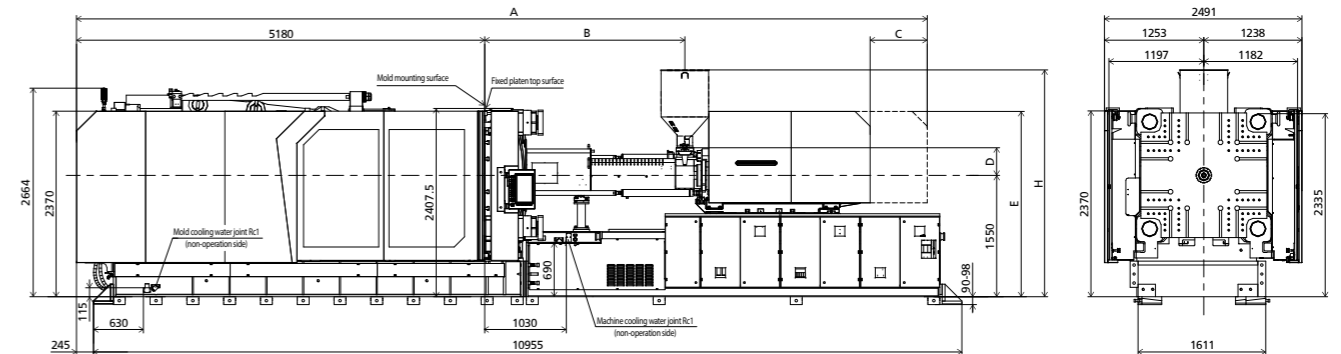


	A	B	C	D	E	F	G	H	I	J	K	L	M	N
2250,2250h	9310	1630	620	327	2201	4XM10 L20	115	2564	225	95	115	67	Ø4	SR15
3350	9579	1841	620	346	2201	4XM12 L25	170	2890	225	100	170	128	Ø4	SR15
5200	10401	2278	720	356	2367	4XM12 L20	170	2884	220	100	170	105	Ø4	SR15
6700	10762	2525	720	354	2367	4XM12 L20	170	2897	232	100	170	115	Ø6	SR20

PLATEN DIMENSIONS

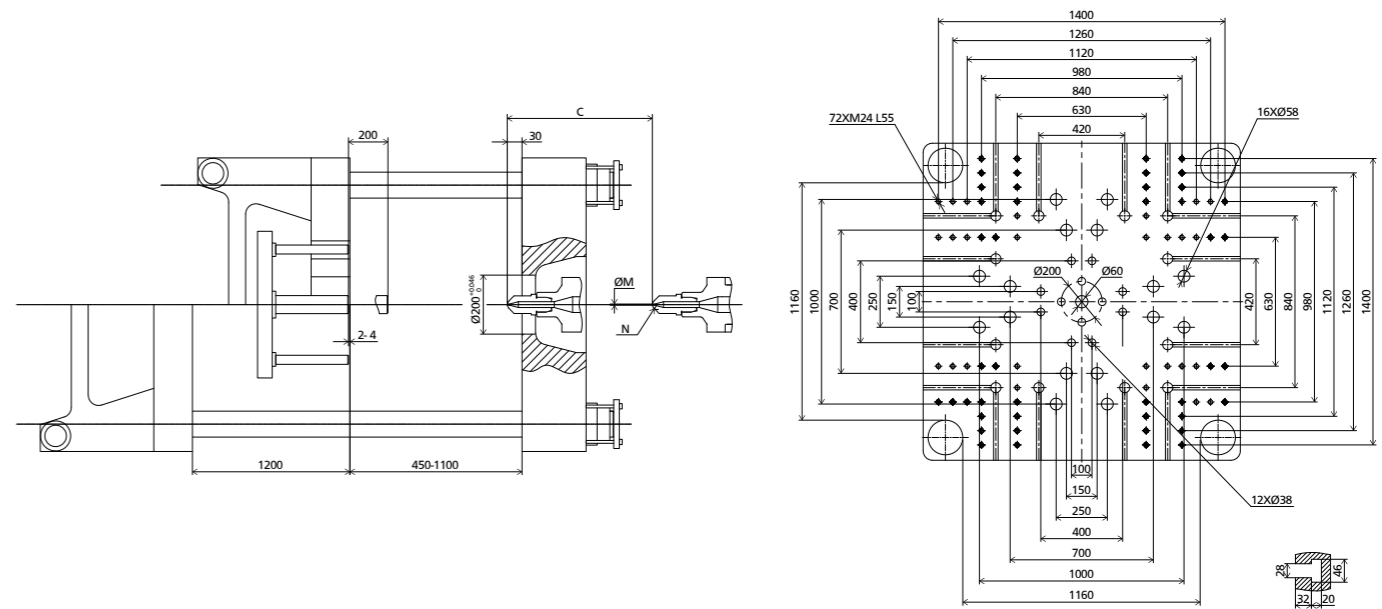

OTHERS DIMENSIONS

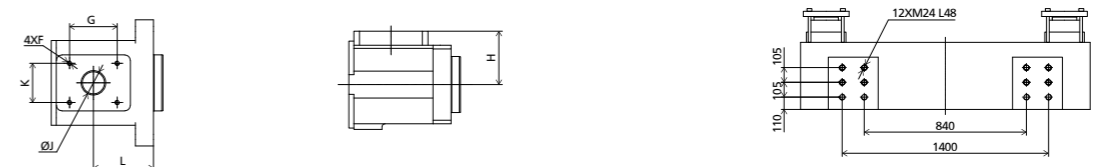

HOPPER MOUNTING DIMENSION

ROBOT TOP VIEW FIXED PLATEN

TECHNICAL DATA VE13800 V

CLAMPING UNIT	Clamping force	kN	13800								
	Mold opening stroke	mm	1500								
	Mold height min.	mm	650								
	Mold height max.	mm	1300								
	Total daylight max.	mm	2800								
	Dist. Between tie-bars (H×V)	mm	1550×1450								
	Size of mold platen (H×V)	mm	2150×2050								
Mold dimension min.	mm	1030×970									
Ejector stroke	mm	250									
Ejector force	kN	300									
INJECTION UNIT			A	B	C	A	B	C	A	B	C
	Screw diameter	mm	80	90	100	90	100	110	100	110	120
	Screw L/D ratio	L/D	24.8	22	19.8	24.4	22	20	24.2	22	20.2
	Injection volume (theoretical) ¹	cm ³	2261	2862	3534	2989	3691	4466	4005	4846	5767
	Injection weight (PS) ²	g	2058	2605	3216	2720	3359	4064	3644	4410	5248
	Injection pressure ³	MPa	227	180	145	222	180	149	218	180	151
		bar	2270	1800	1450	2220	1800	1490	2180	1800	1510
	Holding pressure ³	MPa	204	162	131	200	162	133	195	162	136
		bar	2040	1620	1310	2000	1620	1330	1950	1620	1360
	Screw speed	rpm	190			170			155		
	Plasticizing rate (GPPS) ⁴	g/s	85	107	131	103	127	150	121	145	168
	Plasticizing rate (HDPE) ⁵	g/s	128	162	200	156	191	228	181	217	247
Nozzle contact force	kN	85			85			85			
INJECTION UNIT		5200			6700			8700			
Injection speed	mm/s	160			150			150			
Injection rate (PS)	g/s	702	889	1097	833	1029	1245	1029	1245	1482	
INJECTION UNIT		-			-			-			
Injection speed	mm/s	-			-			-			
Injection rate (PS)	g/s	-			-			-			
OTHERS	Connection power	kW/A	98/164			126/211			151/254		
	Heating power	kW	54.3			75.6			82.8		
	Machine dimension	m	12.72×3.31×3.05			12.72×3.31×3.05			12.72×3.31×3.05		
	Machine weight	t	91.00			91.60			94.30		
Hopper capacity	l	100			100			200			

NOTE: ¹ Shot volume is the theoretical value which equals to cross section area of screw cylinder or barrel plunger × screw stroke.

² Shot weight (PS) is the theoretical value of shot volume melt density of PS. It is not a measured value.


³ Injection & holding pressure are theoretical values of machine output, not the actual resin pressure.

⁴ Plasticizing capacity(GPPS):GB standard, with application of GPPS plasticizing capacity of 3-zone screws.

⁵ Plasticizing capacity(HDPE):Euromap 19, with application of HDPE plasticizing capacity of barrier screws.


This parameter table is based on machine standard configuration;
We reserve the right to make changes as a result of further technical advances.

MACHINE DIMENSIONS

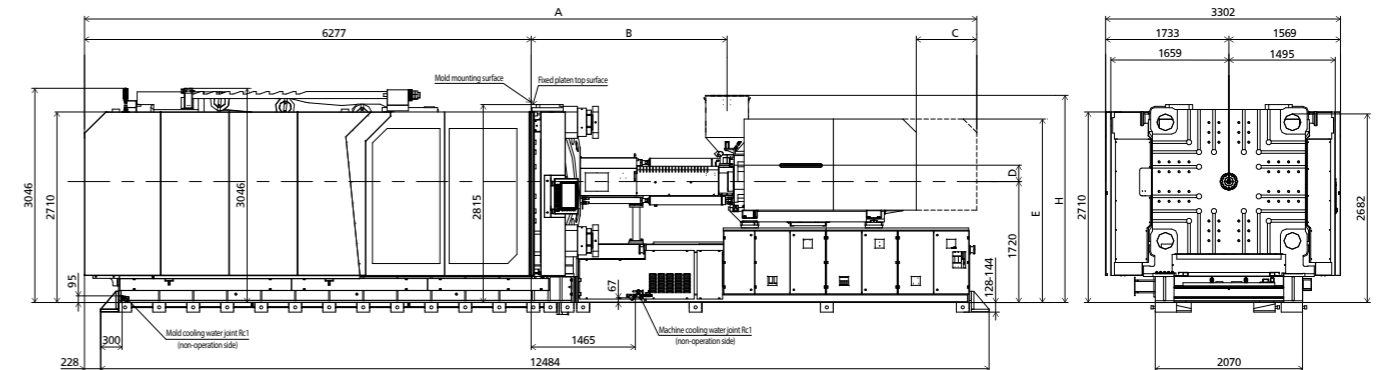


	A	B	C	D	E	F	G	H	I	J	K	L	M	N
5200	11628	2278	850	356	2537	4XM12 L20	170	3054	220	100	170	105	Ø4	SR15
6700	11989	2525	850	354	2537	4XM12 L20	170	3067	232	100	170	115	Ø6	SR20
8700	12539	2753	850	233	2609	4XM12 L20	170	2946	232	122	170	115	Ø6	SR20

PLATEN DIMENSIONS

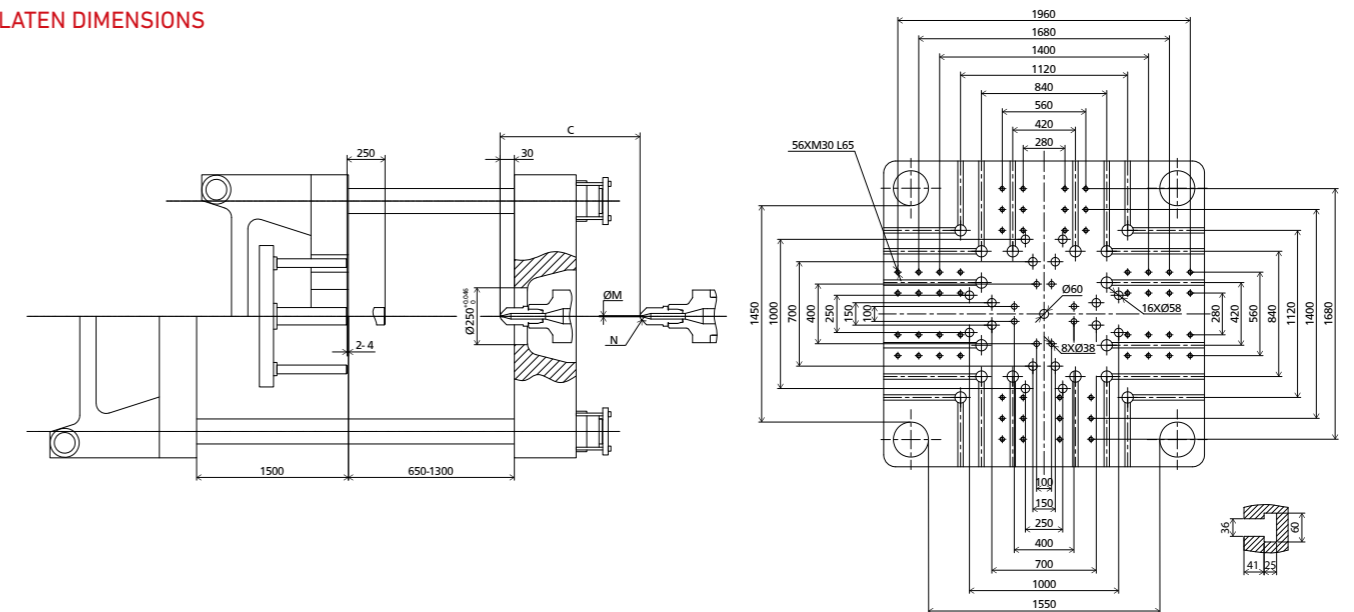


OTHERS DIMENSIONS

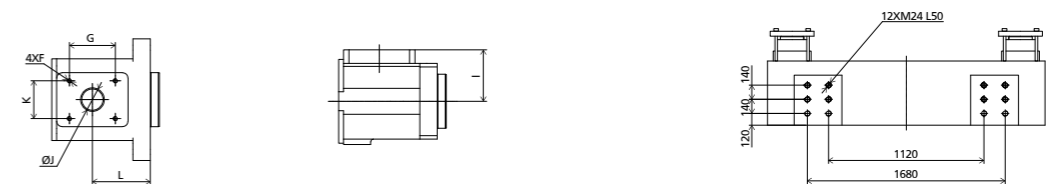


HOPPER MOUNTING DIMENSION

ROBOT TOP VIEW FIXED PLATEN


EUROPEAN VERSION
FIXED PLATEN

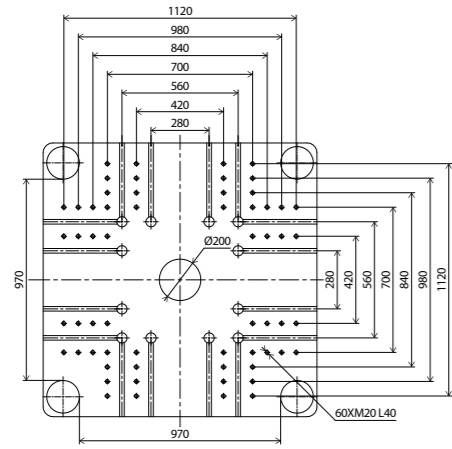


MOVABLE PLATEN

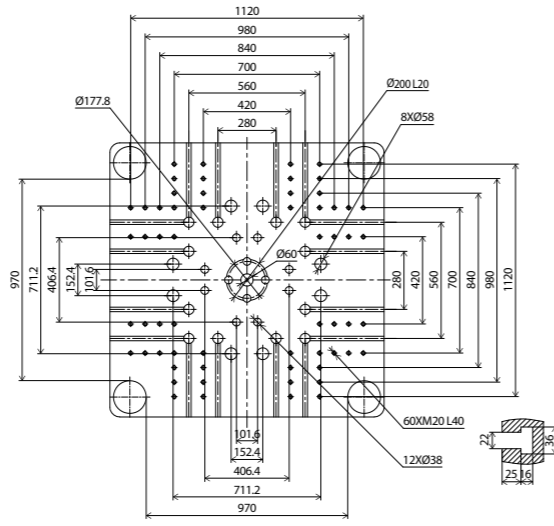


AMERICAN VERSION
FIXED PLATEN

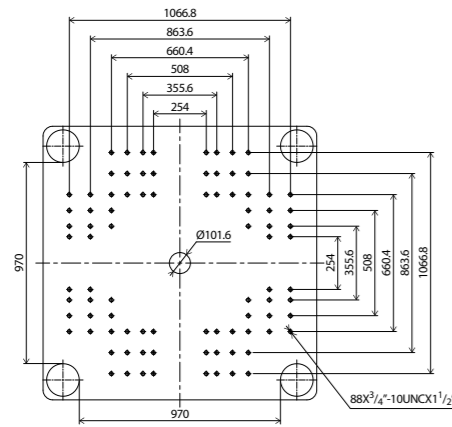


MOVABLE PLATEN

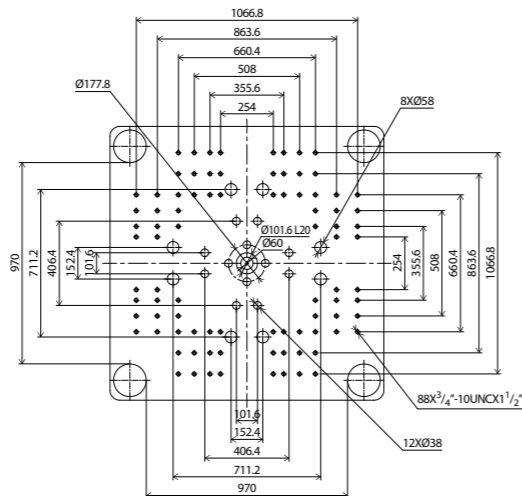

JAPANESE VERSION
FIXED PLATEN

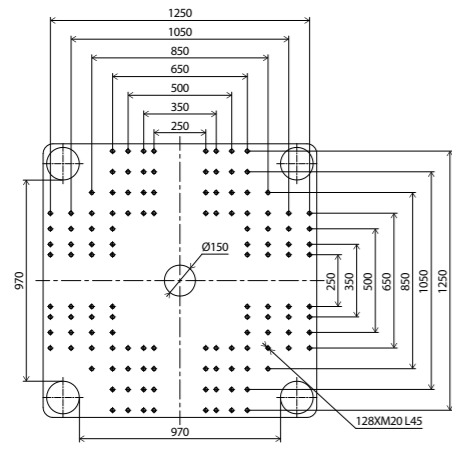


MOVABLE PLATEN

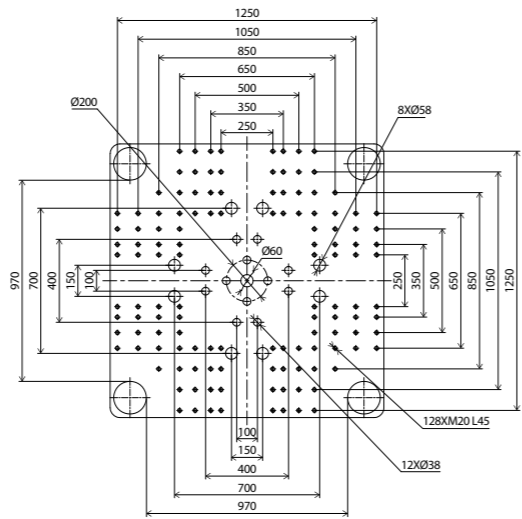


We reserve the right to make changes as a result of further technical advances.


EUROPEAN VERSION
FIXED PLATEN

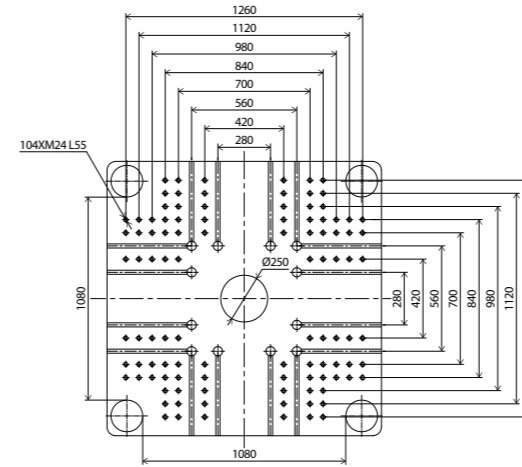


MOVABLE PLATEN

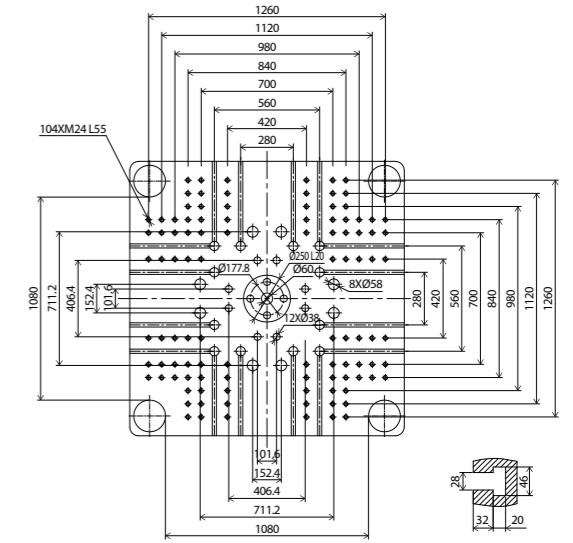


AMERICAN VERSION
FIXED PLATEN

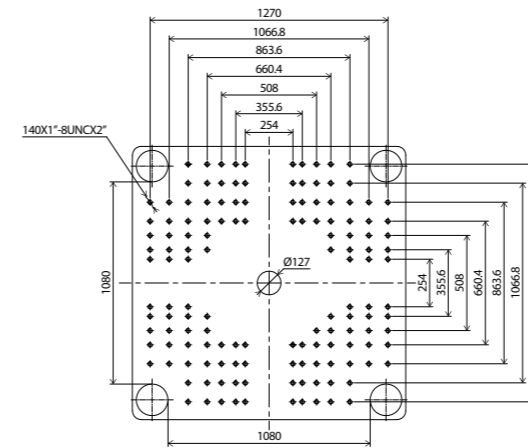


MOVABLE PLATEN

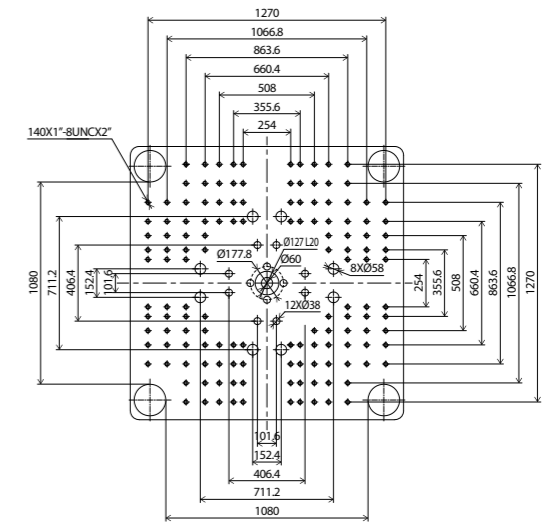


JAPANESE VERSION
FIXED PLATEN

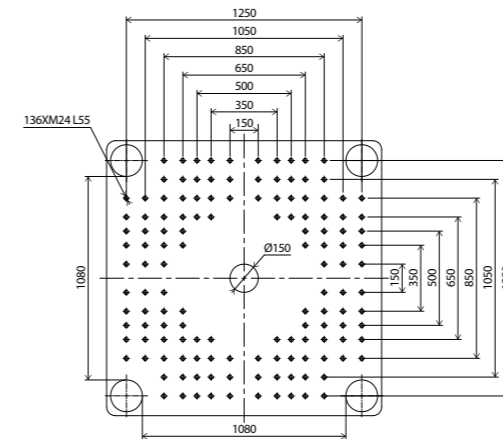


MOVABLE PLATEN

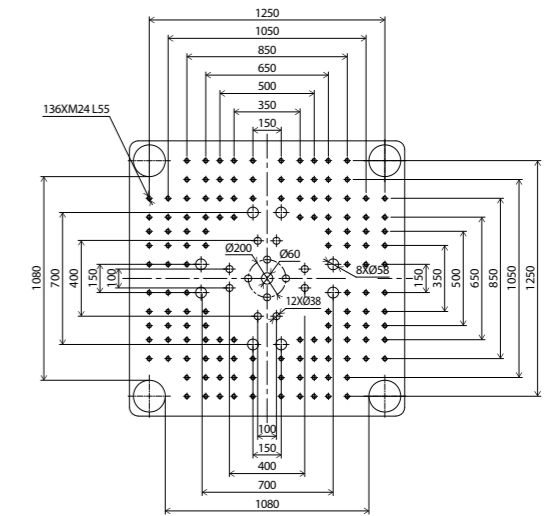


EUROPEAN VERSION
FIXED PLATEN

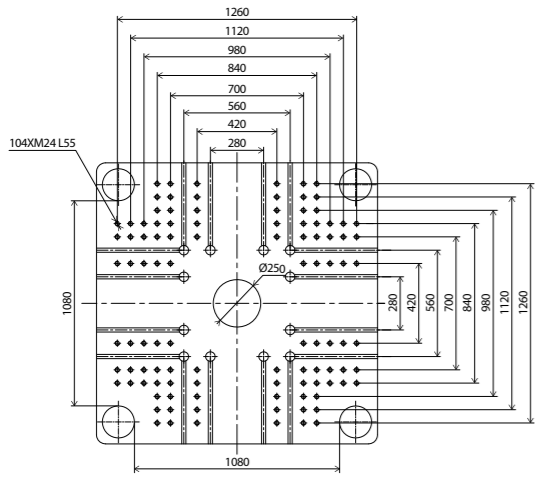


MOVABLE PLATEN

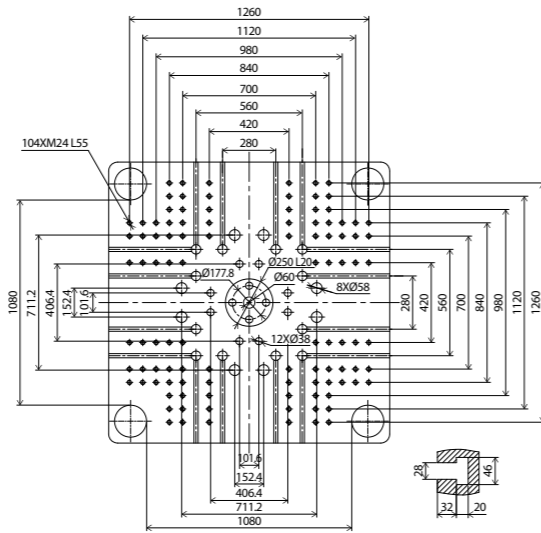


AMERICAN VERSION
FIXED PLATEN

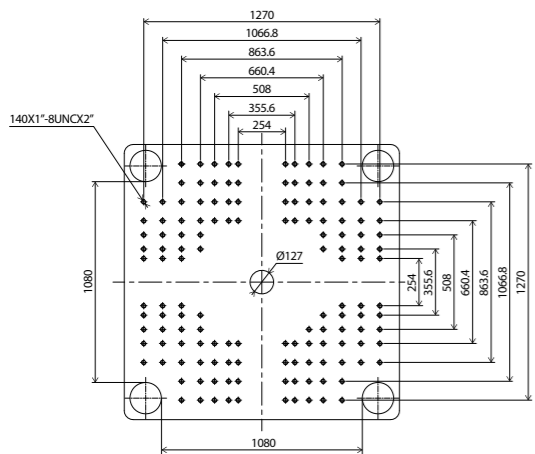


MOVABLE PLATEN

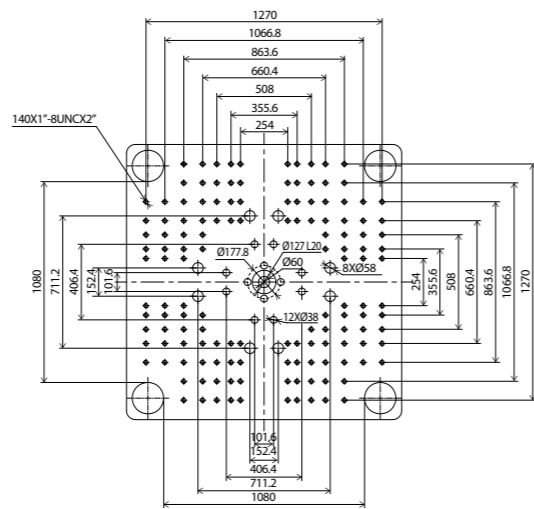


JAPANESE VERSION
FIXED PLATEN

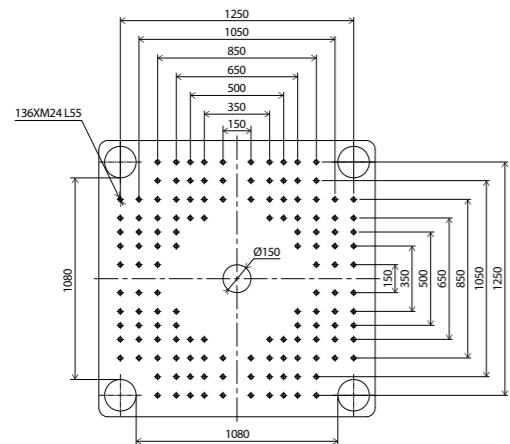


MOVABLE PLATEN

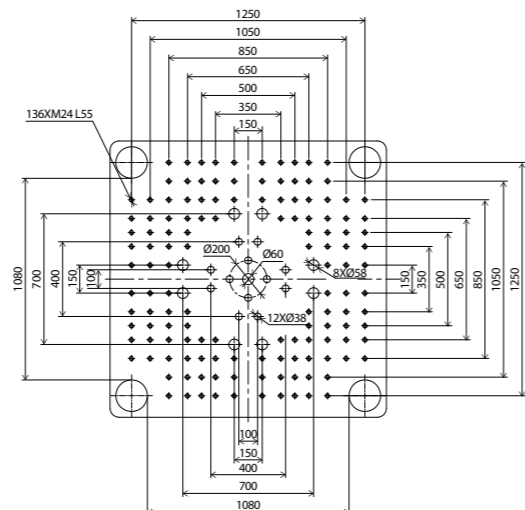


EUROPEAN VERSION
FIXED PLATEN

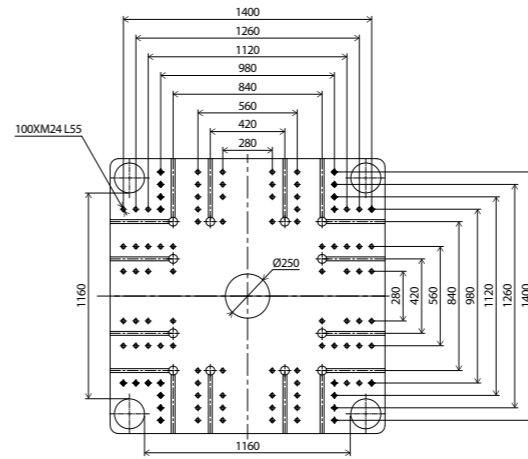


MOVABLE PLATEN

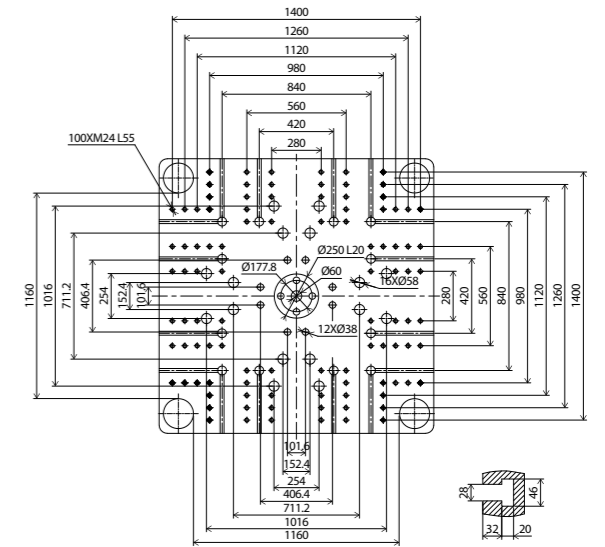


AMERICAN VERSION
FIXED PLATEN

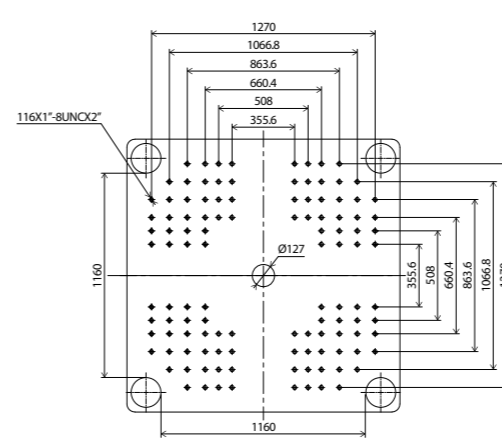


MOVABLE PLATEN

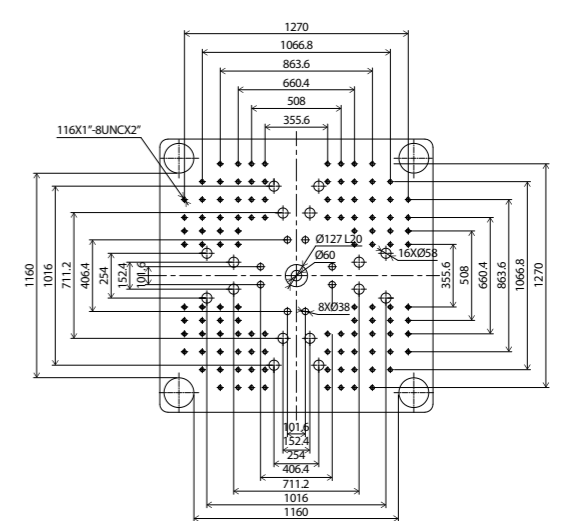

JAPANESE VERSION
FIXED PLATEN

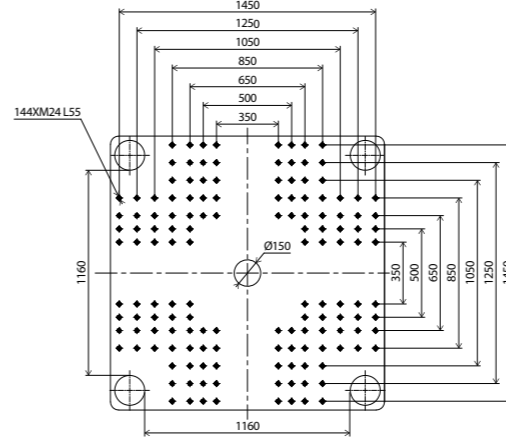


MOVABLE PLATEN

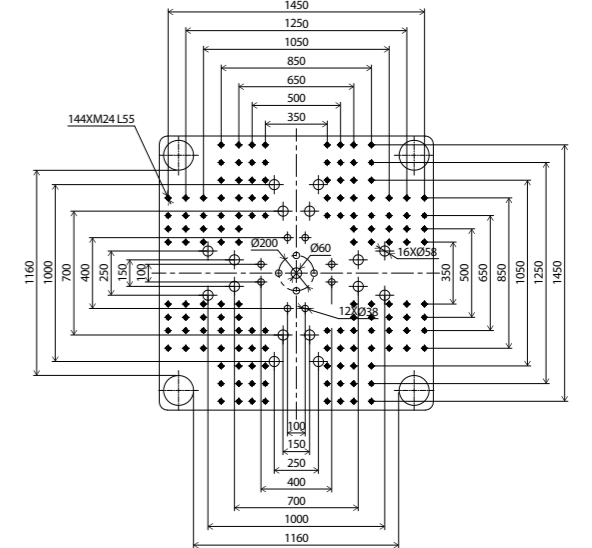


We reserve the right to make changes as a result of further technical advances.


EUROPEAN VERSION
FIXED PLATEN

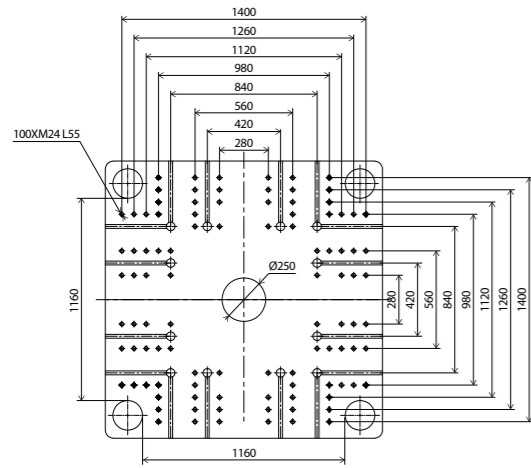


MOVABLE PLATEN

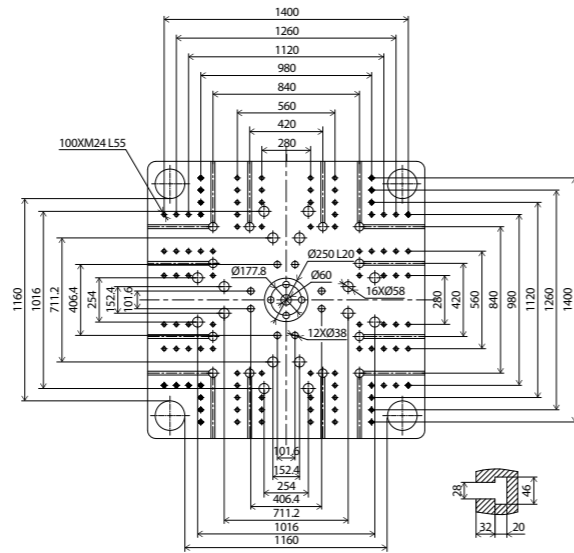


EUROPEAN VERSION
FIXED PLATEN

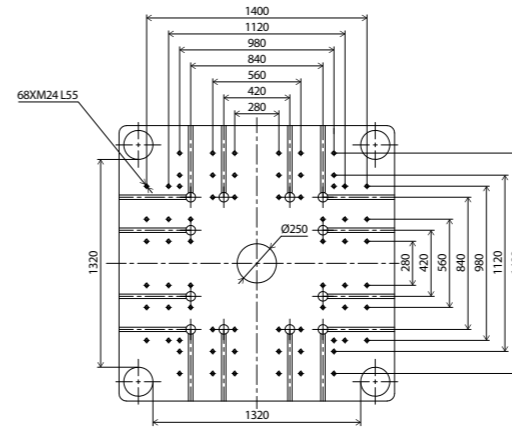


MOVABLE PLATEN

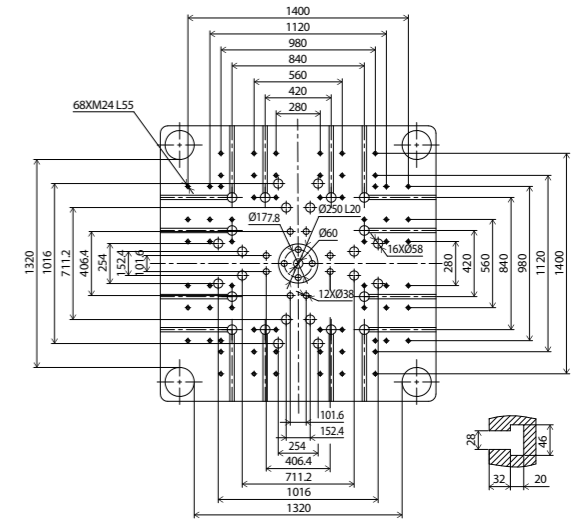


AMERICAN VERSION
FIXED PLATEN

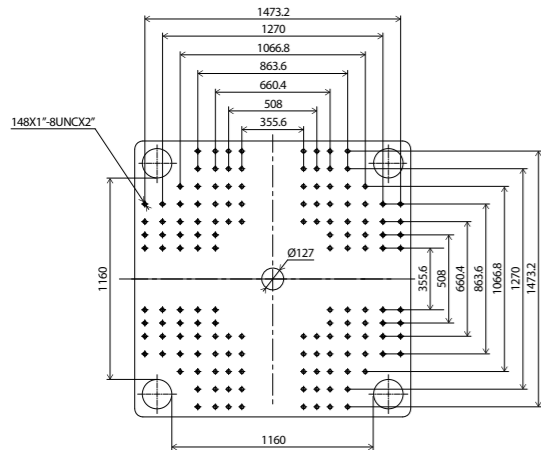


MOVABLE PLATEN

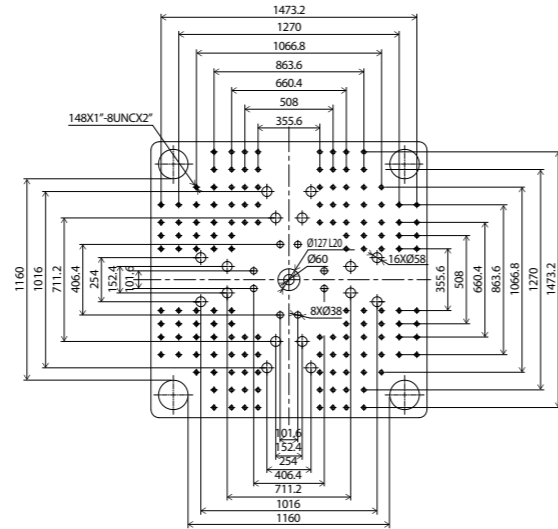


AMERICAN VERSION
FIXED PLATEN

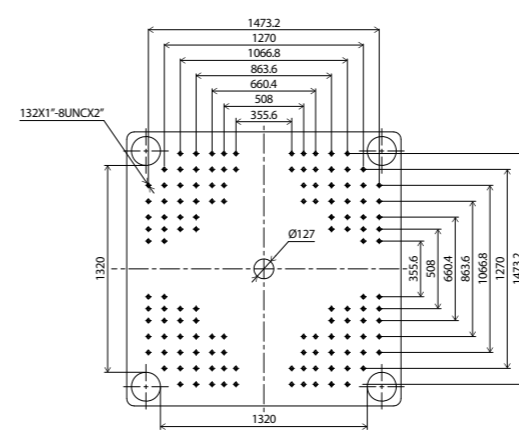


MOVABLE PLATEN

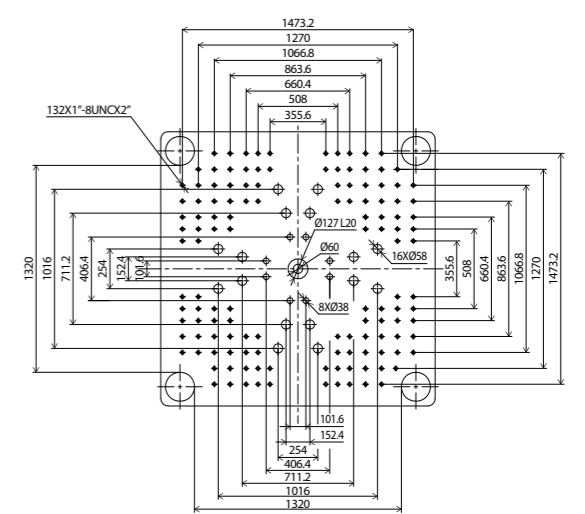


JAPANESE VERSION
FIXED PLATEN

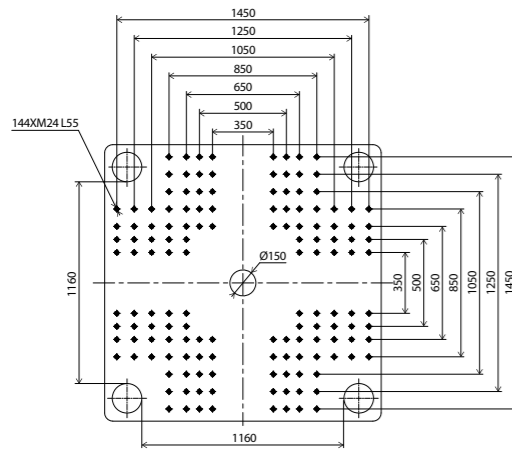


MOVABLE PLATEN

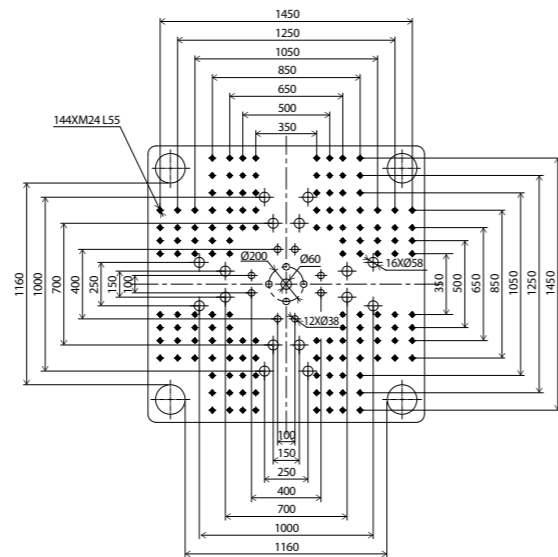

JAPANESE VERSION
FIXED PLATEN

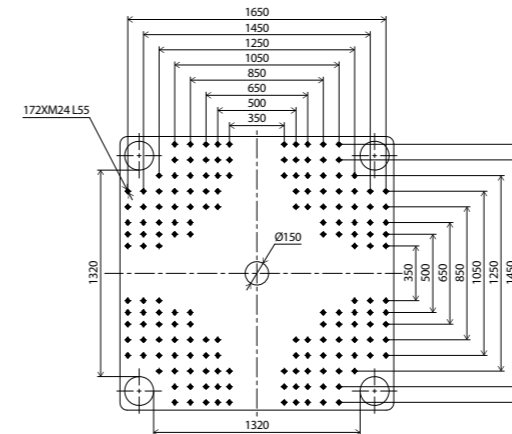


MOVABLE PLATEN

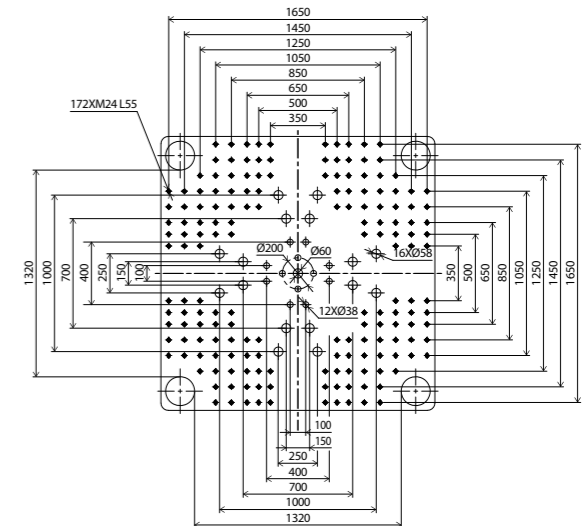


We reserve the right to make changes as a result of further technical advances.


EUROPEAN VERSION
FIXED PLATEN

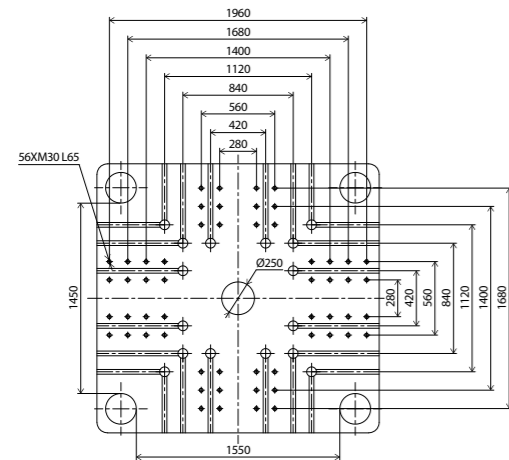


MOVABLE PLATEN

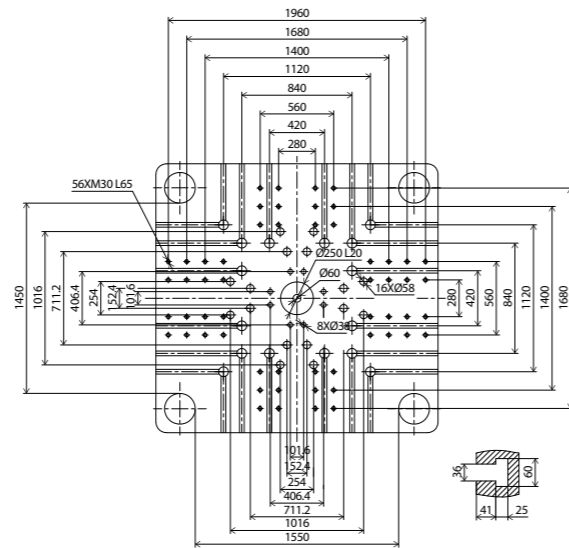


AMERICAN VERSION
FIXED PLATEN

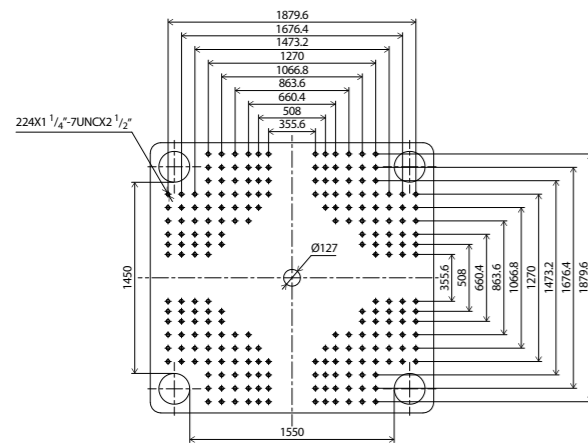


MOVABLE PLATEN

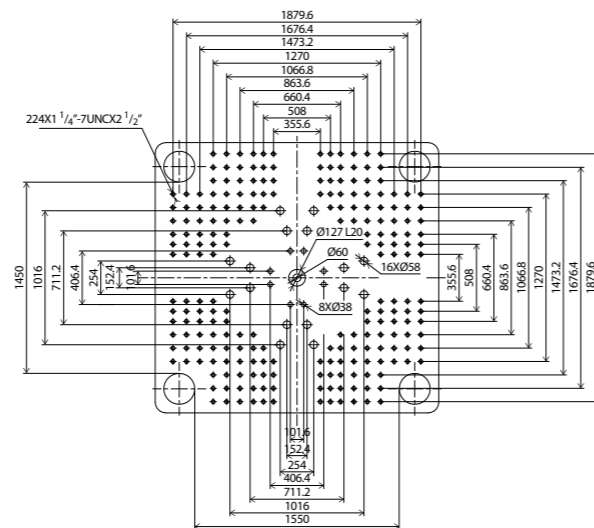

JAPANESE VERSION
FIXED PLATEN

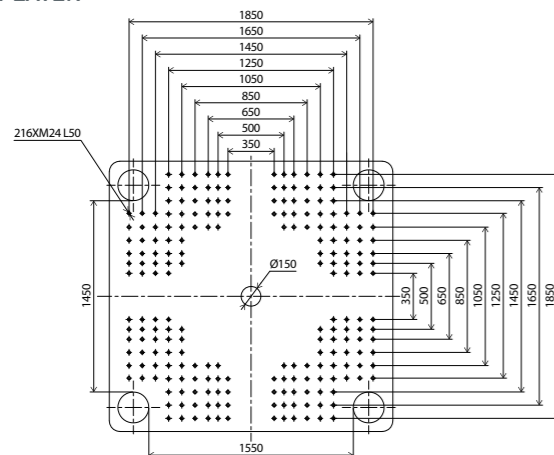

MOVABLE PLATEN

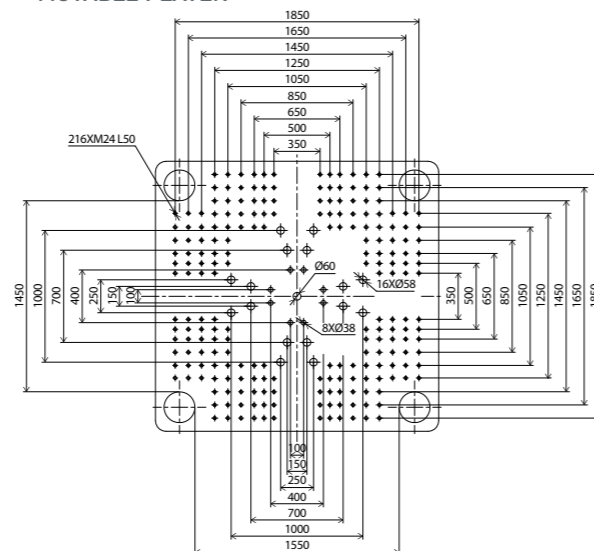

GENERAL EQUIPMENT

- » Basic safety device according to GB/22530
- » ZHAFIR colors: RAL9010, RAL5003
- » Power supply: 380VAC, 3PH+N+PE
- » Sigmatek controller, 15.1 inch touch screen
- » Injection, dosing, platen movement and ejector movement driven independently by servo motor, optical encoder position detection
- » LUBE central lubrication system

INJECTION UNIT

- » Abrasion-resistant screw set, general version
- » Open nozzle
- » Barrel heating temperature PID control, SSR
- » Extended nozzle, temperature PID control independently
- » Feeding zone temperature closed-loop control
- » Injection speed 6 steps
- » Speed responding mode adjustable
- » Holding pressure 4 steps
- » Pressure responding mode adjustable
- » V/P switch over methods by position/ time/ pressure combinations
- » Dosing rotation speed 3 steps
- » Back pressure 3 steps
- » HPM over-filling protection function
- » Screw retraction before and/or after dosing
- » Auto purge

CLAMPING UNIT

- » 5-point twin toggle mechanism
- » Center pressing platen
- » Clamping force settable at control panel
- » Automatic mold-height adjustment
- » Platen moving speed 6 steps
- » AI mold protection
- » Clamping force pre-release
- » Ejector speed 3 steps
- » Ejector pressure 3 steps
- » Multi ejection function
- » Ejection parallel to mold opening

FUNCTIONS & CONTROLS

- » Multi-language available (Chinese, German, English, Japanese etc.)
- » Metric/Imperial unit selectable
- » Dosing parallel to mold opening
- » Injection compression
- » Production assistant device function
- » Maintenance alert
- » 5000 cycles process data recording
- » Amendment report
- » Alarm record
- » Quality control function
- » Mold profile data memory (up to 200 sets)
- » 2 USB interface
- » USB printer interface
- » Injection speed & pressure curve
- » 1 free programmable I/O
- » Mold ejector protection interface
- » EUROMAP 12 interface for handling device
- » Auxiliary socket 3PH/380V 32A×1, 16A×2
- » 3 color alarm lamp (red/yellow/green)

OTHERS

- » Tool kit & spare parts package
- » Leveling pads
- » Documents with machine
- » Operating manual

NOTE

1

2

3

4

5

6

7

8

9

10

1

2

3

4

5

6

7

8

9

10

1

2

3

4

5

6

7

8

9

10

1

2

3

4

5

6

7

8

9

10